




## Skip loader AK18-XLT

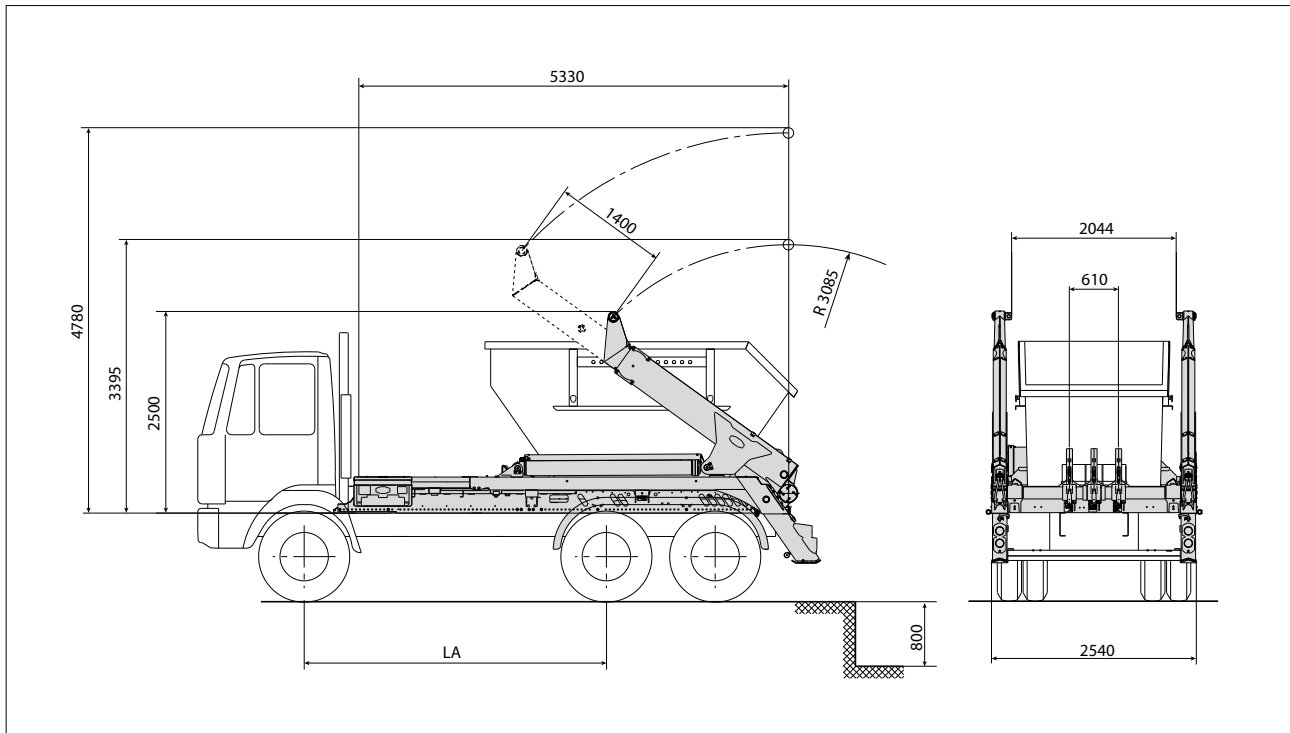

### Technical data

#### Loads and weights:

Lifting load from carriageway level ** (boom length 3,085 mm)	max. 18,000 kg
Lifting load from carriageway level ** (boom length 4,485 mm)	max. 11,000 kg
Lifting load from underfloor level (boom length 3,085 mm)	max. 13,000 kg
Lifting load from underfloor level (boom length 4,485 mm)	max. 8,300 kg
Weight of the skip loader (standard version, pre-assembled)	approx. 3,860 kg
Underfloor position	800 mm

#### Hydraulic system:

Max. operating pressure	275 bar
Oil tank capacity	54 l
Capacity of the entire hydraulic system	approx. 125 l

#### Suitable chassis:

Permissible total weight	> 22,000 kg
Wheelbase, front handlebar (LA)	3,500 – 3,900 mm
Frame overhang	900 – 1,150 mm

Exact dimensions and weights are defined upon determination of the chassis.

#### Suitable container sizes:

- Container according to DIN 30 720 Part 1 up to 10 m<sup>3</sup>,
- Container according to DIN 30 720 Part 2 up to 20 m<sup>3</sup>,
- Compacted waste container according to DIN 30 730 - MAP - AKF
- Special containers by arrangement.

\*\* without consideration of stability.

Subject to change in the course of further development!