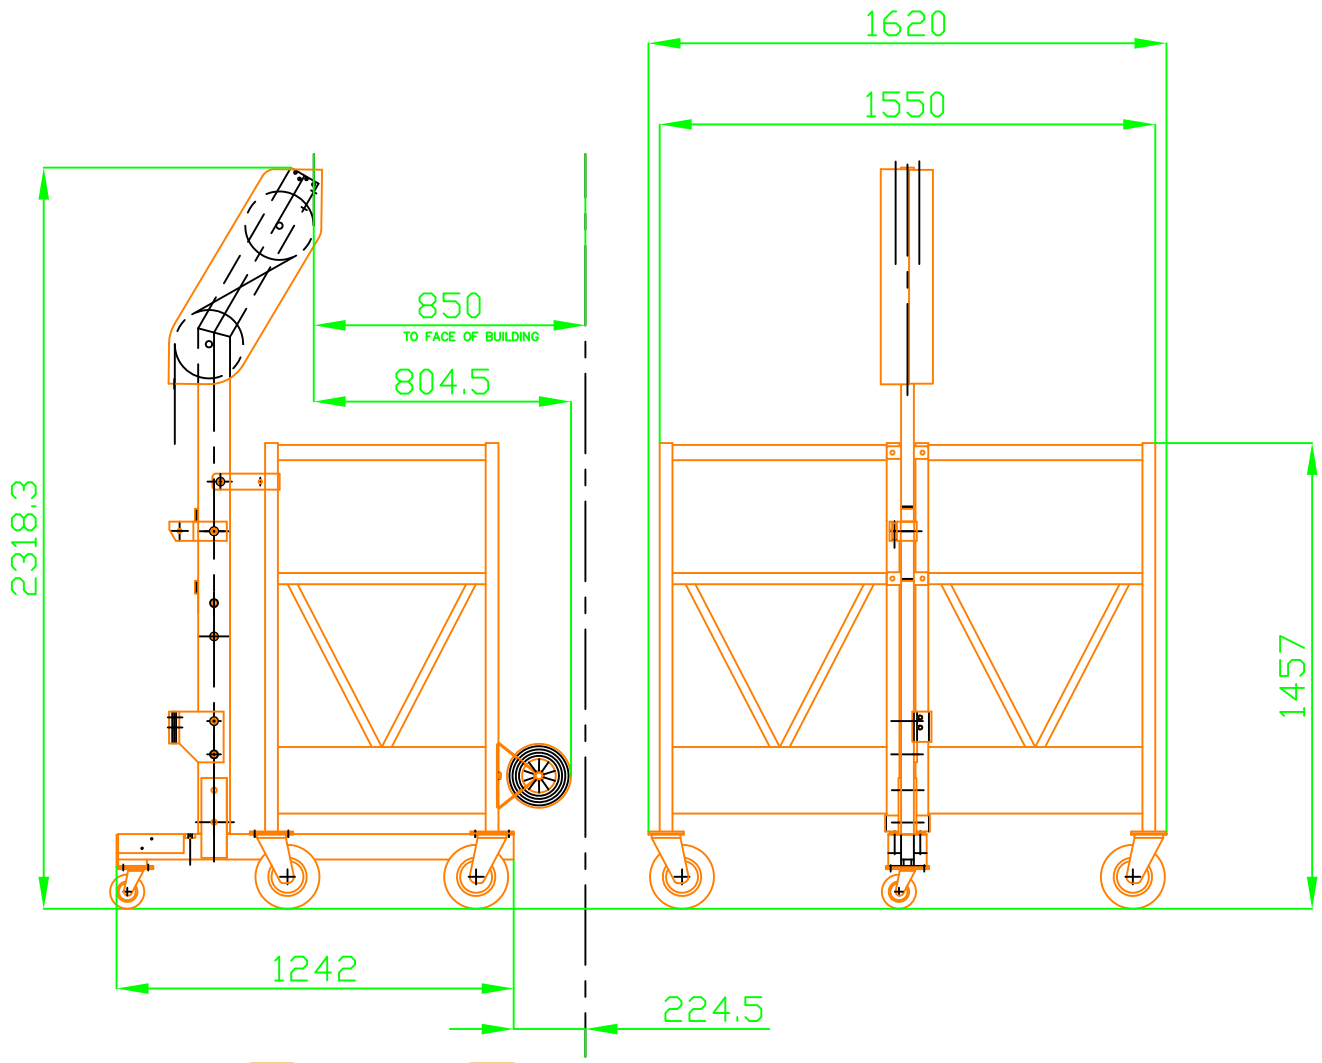

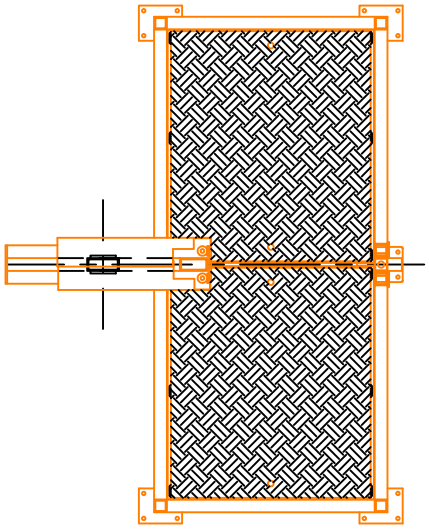

WTS (Plate connection onto Connectionstirrup bottom)

DEBURR AND BREAK ALL SHARP EDGES UNLESS OTHERWISE STATED

GENERAL TOLERANCE ISO 2768 T1	≥	0 6	6 30	30 120	120 400	400
	TOL.	±0.1	±0.2	±0.3	±0.5	±0.8

MACHINED SURFACES ISO 1302

REPLACES S001.50.00/B

REPLACED BY

SCALE	SIZE	USE	DRN
1/25	A4	ALL HOISTS	Erik Dockx

MATERIAL

ISO-SYMBOL	WEIGHT	DATE
		21-03-2000

TREATMENT

TITLE

SPEEDIFIX WORKCAGE

DRG.NR. S001.50.00

REV. C

MODIFICATION

skyman
excellence in powered access

NOEVEREN 56, BLOK 70 2850 BOOM (BELGIUM)
PHONE: +32 3 844 65 86 FAX: +32 3 844 29 56