

# Options & Features...



Automatic self-levelling setup from operator console



Lowerable drive axle for improved steering response

## Working basket:





Optional working basket add-on with a working height of 27m



Working basket easily transported with crane

- sturdy aluminium basket
- maximum basket load 250 kg
- swivelling working basket
- tested acc. to EN 280

## Technical Data

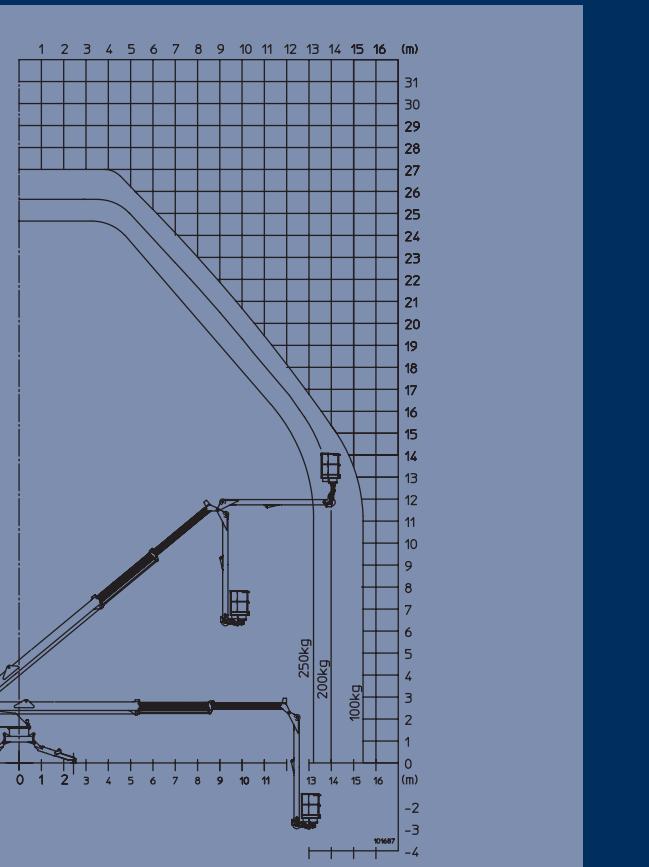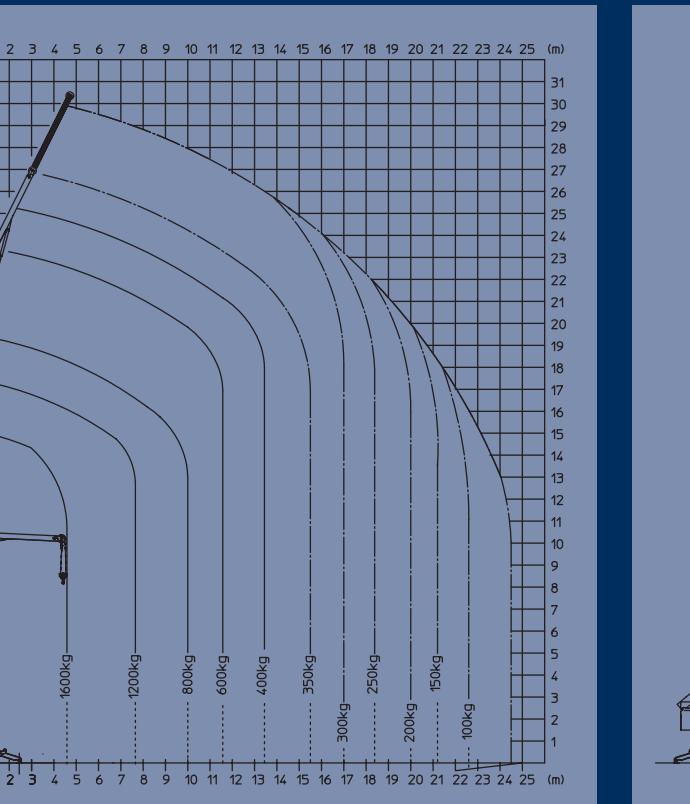

max. extended length	ca. 31,00 m appx.
Jib angle	ca. 0° - 173° appx.
Max. angle of endwise	83° appx.
cable speed	ca. 0 - 50 m/min appx.
Drive	gasoline/ option Diesel
Angular freedom	360° endless
Supporting width	ca. 3,30 m appx.
Supporting length	ca. 4,90 m appx.
Max. carrying capacity	ca. 1.600 kg appx.
Transport width	ca. 1,99 m appx.

Transport height	ca. 2,45 m appx.
Transport length with drawbar	ca. 8,80 m appx.
Axle load	ca. 3,5 tons appx.
Total weight with basic equipments	ca. 3.500 kg appx.
<b>PTK 31 with working basket</b>	
Max. working height during platform operation	ca. 27 m appx.
max. basket load	ca. 250 kg appx.

**PAUS**  
...the people who care

Hermann Paus Maschinenfabrik GmbH  
Siemensstraße 1-9, D-48488 Emsbüren  
P.O. Box 1161, D-48486 Emsbüren  
Tel.: + 49 (0) 59 03 - 707-0  
Fax: + 49 (0) 59 03 - 707-333  
Mail: mail@paus.de  
Internet: www.paus.de

Exclusive distributor:

All information without engagement. Machines comply with the latest European safety directives.  
We reserve the right to make design changes.

**NEW  
PTK 31**



**PAUS**  
...the people who care

Aluminium Trailer Crane

SKY WORKER PTK 31

PTK 31  
**NEW**

## Paus Sky Worker PTK 31: For every application!



Rust protected painted chassis



High degree of angular movement  
(360° endless swivelling) with total stability

### Product Highlights

- Extended length up to 31 m
- Payload max. 1.6 t
- Fully hydraulic head jib

## Inspired Manufacturing...



Variable outrigger setups allow operation in confined areas



Flexible configuration with single fold-away outriggers



Hydraulic fly jib



Big 25 litre fuel tank; low fuel consumption



Compact machine with retractable tow-bar



Ergonomic operator console  
with integrated digital display  
and data feedback