



Mobile Loading Ramps

individual • flexible • robust

Loading Ramps · Industrial Doors

BUTT®




... und das Niveau stimmt!

www.butt.de

MADE IN GERMANY



TYP BK
Mid-axle ramp

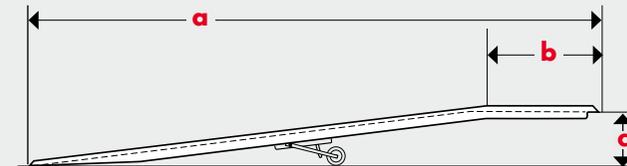

Individually designed mobile loading ramps direct from the manufacturer

Mobile loading ramps from BUTT combine efficiency, mobility and quality for your loading activities.

BUTT – mid-axle range for head-on loading is the classic solution for loading and unloading cargo from trucks and containers and supports your logistic tasks at just the right height. The easy-to-use BK models make an essential contribution to optimising your logistics process. Apart from the most commonly chosen variants, BUTT also develops and produces according to your requirements. We look forward to speaking to you!

- Optimum positioning of the ramp due to centrally located swimming axle reducing the need for manoeuvring
- Simple setting of working heights via manually operated hydraulic pump (also available with electro-hydraulic pump)
- Safety chains – quick lock for fixing the mobile loading ramp to the container/truck
- Swimming axle which compensates for the suspension of the truck/container
- Cardan joint fork clamp for quick positioning of the ramp before and after the loading operation. Also available as manoeuvring device for fork lift loaders with bale clamps (one-man operation)
- Open, anti-slip hot-dip galvanised safety frame in high strength design for safe driving under all conditions. Repels snow, slush and large dirt particles
- Lateral side bar protection as standard
- Low maintenance special heavy load wheels designed by us with cast rims and double ball bearings, lubricating nipple and press on full rubber tyres with steel wire reinforcement

The equipment of all BUTT mobile loading ramps can be adapted to your requirements.



TYP BK 912

Total load carrying capacity 9,000 kg. for use with diesel and gas driven fork lift loaders or modern electro stackers

Load carrying capacity:	9.000 kg	a	11.800 mm
Total length:	11.800 mm	b	2.500 mm
Total width:	2.300 mm	c	(min.)1.100 mm
Driving width:	1.960 mm		(max)1.750 mm
Lip width:	2.140 mm		
Lip length:	400 mm		

TYP BK 713

Specially developed for the loading of particularly high cargoes easily and safely over 3,500 long horizontal.


Load carrying capacity:	7.000 kg	a	12.800 mm
Total length:	12.800 mm	b	3.500 mm
Total width:	2.300 mm	c	(min.)1.100 mm
Driving width:	1.960 mm		(max)1.750 mm
Lip width:	2.140 mm		
Lip length:	400 mm		

TYP BK 715

Specially suited for electro stackers in order to keep battery power loss as low as possible by means of a favourable ramp incline.*

Traglast:	7.000 kg	a	14.800 mm
Gesamtlänge:	14.900 mm	b	3.500 mm
Gesamtbreite:	2.300 mm	c	(min.)1.100 mm
Fahrbreite:	1.960 mm		(max)1.750 mm
Lippenbreite:	2.140 mm		
Lippenlänge:	400 mm		

*Type BK 912 can also be used electro stackers made after 1990 .

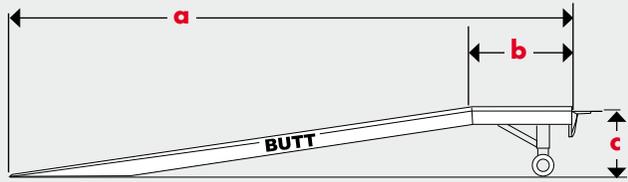

TYP BKV
Front-axle ramp/head-on loading

Total load carrying capacity 10,000 kg. For head-on loading

Load carrying capacity:	10.000 kg	a	11.800 mm
Total length:	11.800 mm	b	2.500 mm
Total width:	2.300 mm	c	(min.)1.200 mm
Driving width:	1.960 mm		(max)1.650 mm
Lip width:	2.000 mm		
Lip length:	600 mm		

Mobile loading ramps ideally matched to your logistic requirements

BUTT mobile loading ramps with front-axle for head-on loading in the BKV range.

The BUTT BKV range of ramps with front-axle for head-on loading combines all the advantages of the BK series and can be used in all those situations where above-average loading and unloading stresses arise. All the equipment of the BUTT mobile loading ramps in the BKV range can be adapted to your special requirements!





- Special ramps for every purpose available on request
- Hot-dip galvanisation of the entire mobile loading ramp available at additional cost.
- Coated in RAL colour tones as desired.
- Electrical drive available for all models.

- Broad driving area enabling comfortable up and down driving
 - Simple setting of the working height via mechanical winch (also available with electromechanical drive)
 - Safety chains – quick lock for fixing the mobile loading ramp to the container/truck
 - Cardan joint fork clamp for quick positioning of the ramp before and after the loading operation.
- Also available as manoeuvring device for fork lift loaders with bale clamps (one-man operation)

- Open, anti-slip hot-dip galvanised safety frame in high strength design for safe driving under all conditions. Repels snow, slush and large dirt particles
- Lateral side bar protection as standard
- Low maintenance special heavy load wheels designed by us with cast rims and double ball bearings, lubricating nipple and press on full rubber tyres with steel wire reinforcement



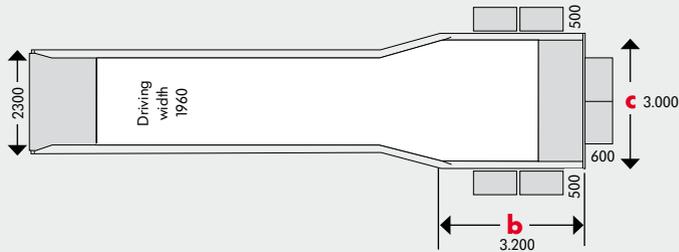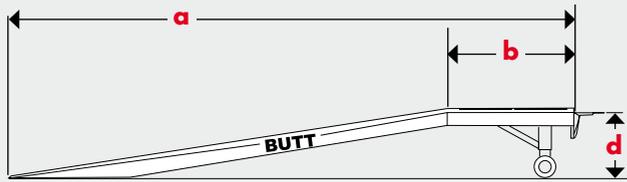

TYP BKV
Front-axle ramp/ 3-side loading

Mobile loading ramps are flexible and efficient partners for your logistic needs

BUTT mobile loading ramp for 3-sided loading with height adjustable front axle in the BKV type range

The 3-sided loading ramp with front axle is a highly flexible mobile loading ramp and represents the simplest way of optimising your loading and unloading operations.

- Centrally divided barrier lips set horizontally for lateral and head-on loading.
- Manual support winch, also available with electric height adjustment

The right is reserved to make technical changes.



BUTT GmbH

Zum Kuhberg 6-12
D-26197 Großenkneten (Germany)
Telephone: +49 (0) 4435/9618-0
Fax: +49 (0) 4435/9618-15
Internet: www.butt.de
Email: butt@butt.de

Berlin Branch

Gewerbeparkstraße 14
D-16356 Werneuchen-Seefeld (Germany)
Telephone: +49 (0) 33398/87400
Fax: +49 (0) 33398/87403
Internet: www.butt.de
Email: butt@butt.de

TYP BKV 1013
Total load carrying capacity : 10,000 kg. for 3-side loading

Load carrying capacity : 10,000 kg	a	12.500 mm
Total length: 12.500 mm	b	3.200 mm
Total width: 3.000 mm	c	3.000 mm
Driving width: 1.960 mm	d	(min.) 1.200 mm
Lip width: 2.000 mm		(max) 1.650 mm
Lip length: 600 (500) mm		

