

HMF 340K-MC

The HMF 340K-MC is a sturdy and versatile crane with great flexibility.



Main benefits

- Long lifespan
- Easy to operate
- Very compact design

High lifting capacity at long reach in a horizontal boom position

The HMF 340K-MC is a compact knuckle boom crane with an excellent lift-to-weight ratio. The crane is reliable and sturdy and can be used for a wide range of different tasks.


The link arm on the jib provides a high lifting capacity at long reach in a horizontal boom position. The crane is designed in a compact way with a short platform length which offers good utilisation of the truck body. This crane is also available with a width of 2.0 m in order to suit most vehicles.

PERFORMANCE	340-K1	340-K2	340-K3
Load Moment (tm)	3,2	3,2	3,2
Hydraulic reach (m)	4,39	5,76	7,15
Weight excl. stabilizers (Kg)	418	468	508
Weight of stabilizers, standard (Kg)	72	72	72
Lift-to-weight ratio	6,5	5,9	5,5
Slewing Angle (°)	370	370	370
Slewing torque (kgm)	550	600	600
Working pressure (bar)	220	240	240
GEOMETRY			
Height above mounting surface (mm)	1591	1591	1591
Width, folded, standard (mm)	1700	1700	1700
Length of crane, no extra valves (mm)	516	516	516


Lifting Capacity




340-K1-MC

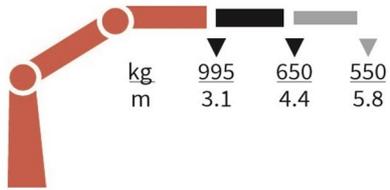

340-K2-MC

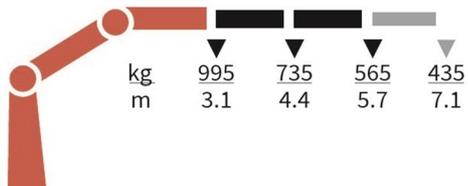

340-K3-MC

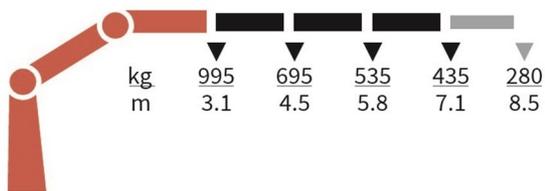

Basics and options

Basics

HMF 340K-MC

Load indication
MC
Single power plus link arm system
Environmentally friendly quality coating

Options

Electrical options
Spotlight
Voltage
Extra valves
Extra valves in hose guides
Hydraulics
Biodegradable oil
High-pressure filter
Oil tank 20 l mounted on the crane
Mechanical options
Manual extension
Crane orientation
Mounting bolt kit
Mechanical slew limitation
Crane width
Stability and safety
Beam and height warning
CE safety system. Stop button, load indicator and bubble level
Safety system for cranes without CE equipment incl. spirit level
Colours
RAL colors