

# HMF 1130K-RCS

The HMF 1130K-RCS is a reliable and wear-resistant crane with high lifting capacity at long reach, in high positions, and close to the column.



## Main benefits

- Compact design
- Radio remote control system for total freedom
- Single link arm system on the jib for extra strength and stability

## A strong crane with high lift-to-weight ratio

The HMF 1130K-RCS is fitted with a single Power Plus link arm system and an HDL-d speed adaptation system, which provide a very fast and precise handling.


The low tare weight and reduced space requirements of the crane provide a good lift-to-weight ratio as well as full utilisation of the truck body.

PERFORMANCE	1130-K1	1130-K2	1130-K3	1130-K4	1130-K5
Load Moment (tm)	10,5	10,2	9,9	9,7	9,5
Hydraulic reach (m)	5,5	7,5	9,7	11,8	14
Weight excl. stabilizers (Kg)	985	1090	1190	1280	1360
Weight of stabilizers, standard (Kg)	160	160	160	160	160
Lift-to-weight ratio	9,2	8,2	7,3	6,7	6,3
Slewing Angle (°)	420	420	420	420	420
Slewing torque (kgm)	1325	1325	1325	1325	1325
Working pressure (bar)	345	345	345	345	345
GEOMETRY					
Height above mounting surface (mm)	2135	2135	2135	2135	2135
Width, folded, standard (mm)	2350	2350	2350	2350	2350
Length of crane, no extra valves (mm)	747	747	747	747	747


# Lifting Capacity




1130-K1-RCS




1130-K2-RCS

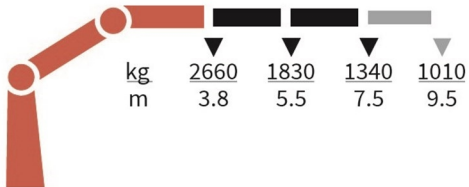


1130-K3-RCS

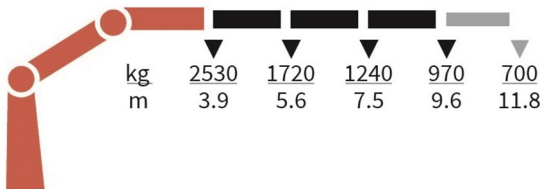

1130-K4-RCS

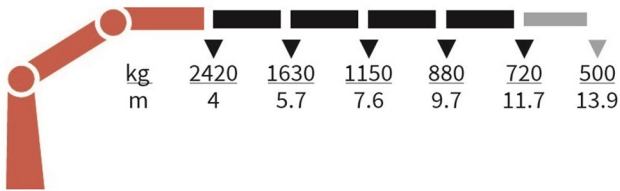

1130-K5-RCS

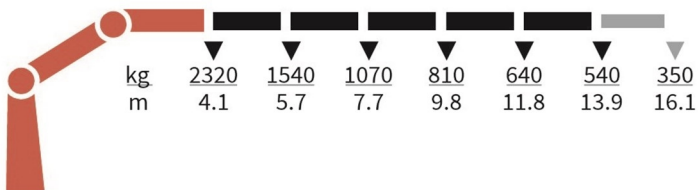

# Basics and options

## Basics

HMF 1130K-RCS

Electronic speed adaptation, HDL-d
Progressive crane control
Priority flow control
Single power plus link arm system
Proportional control valve PVG 32
Internal hose routing
Environmentally friendly quality coating
RCL safety system

## Options

<b>Control stations</b>
High stand RC
Top seat RC
Heated seat
<b>Control systems</b>
Radio remote control Maxi
Radio remote control Mini
Radio remote control with Power display
Extra digital outputs
<b>Electrical options</b>
Spotlight
Voltage
<b>Extra valves</b>
Extra valves in hose guides
Extra valves in hose reels, internally led
Multi-coupling
<b>Hydraulic hoist</b>
Hydraulic hoist 1500
2-part snatch block
<b>Hydraulics</b>
4 manually controlled available stabilizer functions
2 manually controlled available stabilizer functions
1-4 available radio remote-controlled functions
Biodegradable oil
Ball valve for tank
Oil cooler, medium
Oil tank 55 l mounted on the crane
Radio remote control of stabilizer beams and stabilizer legs on crane
Temperature monitoring
<b>Mechanical options</b>
Manual extension
Hook for manual extension
Crane orientation
Mounting bolt kit
Fittings for mounting bolt kits
<b>Stability and safety</b>
Electronic vehicle stability - EVS
AutoSwitch
Cylinder limitation
2-section Cylinder and beam limitation
Limitation of working area – horizontal
Cabin anti-crash

2-stage load moment limitation
Preparation for alternative stability system
Stabilizer duty control
Alarm flash on stabilizer legs
Calibration bypass
Light tower
High stand safety system - basic
High stand safety system - envelope
High stand safety system - quadrant
Quadrant operator protection system
Beam and height warning
Beam and park warning
Stabilizer leg warning
<b>Stabilizer beams and legs</b>
Manual swing-up stabilizer legs with gas spring
Manual swing-up stabilizer legs
Fixed vertical stabilizer legs
Footplate with ball joint
Footplate extended
Hydraulic stabilizer beams 4.2 m - 5.1 m
Fixed vertical stabilizer legs, short
Manual stabilizer beams 4.2 m - 5.1 m
<b>Colours</b>
RAL colors