

VERSALIFT

VDT-170-F

**Chassis mounted
telescopic platform**



PTO driven hydraulic pump



FPC controls with up to 4 actions at a time



Turret tailswinging within the mirrors



Outriggers within the mirrors



1 kV certified low voltage insulation



VERSALIFT

A **TIME** MANUFACTURING COMPANY


VDT-170-F on MAN TGL





Due to the lift's unique design, there is plenty of room on the flatbed for goods or even a toolbox.

Booms are fabricated from high strength steel providing the most stable and safe cage experience available on the market

■ Length: 6,550 mm ■ Height: 3,823 mm ■ Wheelbase: 3,050 mm

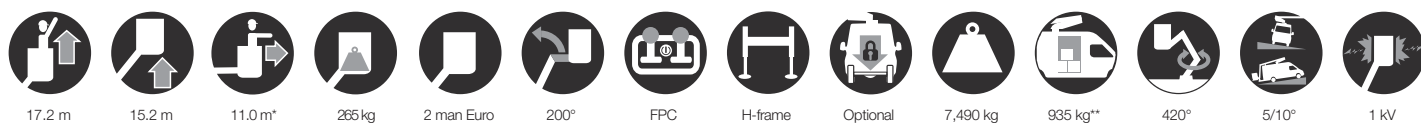

Diagramme(s)

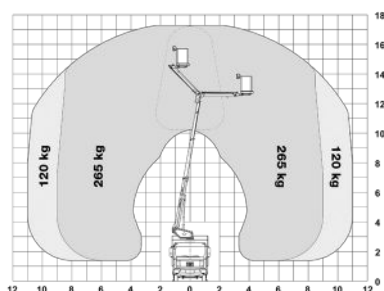

Options

- Hydraulic axle locking system
- Cabinets for the chassis
- Workshop interior
- Bucket rotator (2 x 85°)
- Extended bucket (replaces standard bucket)
- Outrigger pads with holders
- Reversing camera
- Limited working area without outriggers
- Load cell (Variable load dependant outreach)
- Drive option (drive the vehicle with raised platform)



e-Tech battery solution



H-frame outriggers



Workshop interior (optional)



FPC (Full Proportional CANbus controls): Up to 4 simultaneous actions (2 per joystick)

Notes

Technical information is subject to change without prior notice. Images may show optional equipment. Installations and/or options may not be available in your specific region.

* Depending on the vehicle.
 ** Max payload with a driver, a passenger and a full tank of fuel (240 kg added to the installation weight).
 *** Reduced outreach and max 230 kg bucket capacity.
 **** Requires the option "Limited working area without outriggers".

Distributor

Versalift International
 Soendervang 3, 9640 Farsoe
 Denmark
 +45 9863 2433
 sales@versalift.dk
 versaliftinternational.com