

## Series CL-M1

The CL-M1 series includes a range of models featuring a single vacuum pad whose maximum lifting capacity is up to 750 kg.

This vacuum lifter is powered by a **long-lasting, rechargeable battery** (220V charger included).

The manual tilting system allows vertical - horizontal movement and vice versa.

The lifter is equipped with an **audio-visual alarm system** that warns the operator of possible dangers. In addition, the vacuum gauge with coloured scale allows constant monitoring of the vacuum level. The lifter's longevity is also guaranteed by a **dust and condensation filter system**.

 Kg max  
750

 Power supply  
 Batteries



Sollevamento orizzontale



Single vacuum circuit



Vertical lifting



Ideal for wall cladding



Manual tilt 0-90°



Radio remote control on request




made in  
**ITALY**

### Technical specifications

<b>Application</b>	Installation of wall panels and cold rooms
<b>Capacity</b>	Up to 750kg
<b>Suction pads</b>	A single suction pad
<b>Load movement</b>	Manual tilt 0-90°
<b>Power supply</b>	Rechargeable battery
<b>Vacuum system</b>	Single vacuum circuit, complete of vacuum reserve and non-return valve
<b>Tare</b>	Depends on the model – max 75kg
<b>Control</b>	Manual valve on the lifter's frame Release of the load by dual action security command
<b>Standard features</b>	Audible and visual low vacuum warning devices with external charger Vacuum gauge with colored scale, vacuum filter, non-return valves
<b>Models</b>	CL-M1-250 CL-M1-300 CL-M1-500 CL-M1-750

## Technical drawings

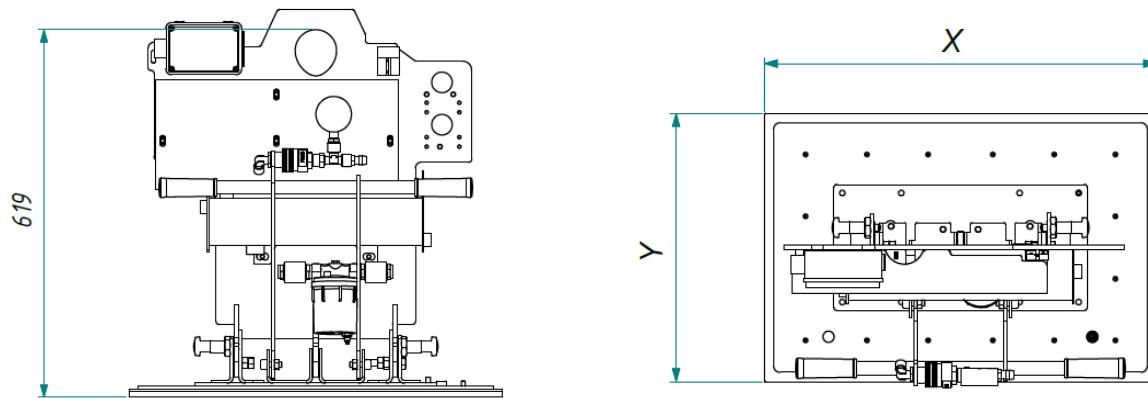

Model	Lifting capacity (kg)	Suction pad X (mm)	Suction pad Y (mm)
CL-M1-250	250	630	280
CL-M1-300	300	630	330
CL-M1-500	500	630	430
CL-M1-750	750	830	430

## Examples of use

